



EURUS SWEATER

Eurus is our modern interpretation of a classic Aran sweater. With an oversized silhouette and traditional cables, it is sure to be a timeless wardrobe favourite. It is constructed from sleeve to sleeve, and the sides are seamed together at the end. To finish, stitches are picked up for the neck band and ribbing along the bottom edge.

SIZE GUIDE

1 (2) 3

Finished sweater circumference approx.: 120cm (130cm) 140cm

Length, measured mid-back including neckband and bottom ribbing: 66cm (68) 70 cm

Length from cuff to cuff: 150cm (160cm) 170 cm

Wingspan:144 (145) 152 cm

Be aware that this is a lightly oversized sweater with a boxy and short shape. The pictured sweater is a size 1 shown on a XS model.

YARN AND GAUGE

The sweater is made with 1 strand of Håndværksgarn from Hjelholt Uldspinderi

AEGYOKNIT © COPYRIGHT 2022

This knitting pattern is only intended for private use, and may therefore not be copied, resold or redistributed. In addition, finished knitted products may not be marketed for resale or used in a commercial context.

700g (900g) 1000g

White sweater pictured: håndværksgarn shade 01 hvid.

Gauge: 16 sts x 20 rows in stockinette st = 10 cm x 10 cm on needle 6 mm.

Note: This gauge will change when you begin to work cables, so be aware that you maintain gauge, see gauge for cable 1 below.

Gauge for cable 1: 15 sts x 18 rows = 10 x 10 cm

Suggested needles:

3.5 mm circular needle (40 - 80 cm)

6 mm circular needle (40 - 80 cm)

Cable needle 5 or 6 mm.

INTRODUCTION AND ABBREVIATIONS

Always read through the whole pattern before you start knitting as it contains important information.

Abbreviations:

Stitch marker: stm

Stitch(es): st(s)

Knit: k

Knit 1 through back loop: ktbl

Purl: p

Place stitch marker: pm

Cable needle: cbn (5 or 6 mm)

Cable: cbl

increase: inc

M1R: With the left needle, pick up the strand between sts from back to front, knit this stitch.

M1L: With the left needle, pick up the strand between sts from front to back, knit this stitch through the back loop.

Cable 1 : over 8 sts and 8 rows

Row 1. Knit all


Row 2. K on RS, P on WS.

Row 3. Place 2 sts on cbn at the back of the work, k2, k2 from cbn, place 2 sts on cbn in front of work, k2, k2 from cbn. Repeat over x sts.

Row 4. K on RS, P on WS.

Row 5. Knit all

Row 6. K on RS, P on WS.

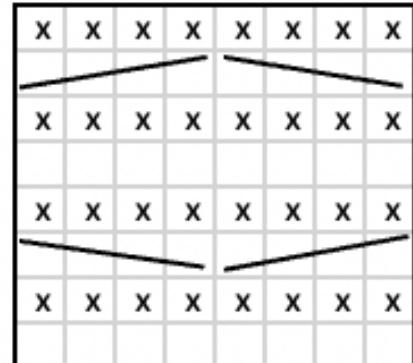

Row 7. Place 2 sts on cbn in front of work, k2, k2 from cbn, place 2 sts on cbn at the work of the work, k2 k2 from cbn. Repeat over x sts.


Row 8. K on RS, P on WS.

Cable 2 : worked over 2 sts and 2 rows, worked either as right or left leaning on each side of the work.

Right leaning :

Row 1. Place 1 st on cbn at the back of the work, k1, k sts from cbn.

Row 2. K on RS, p on WS

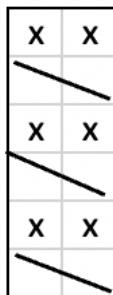


Left leaning :

Row 1. Place 1 st on cbn in front of the work, k1, k st from cbn.

Row 2. K on RS, p on WS.

This cable can also be worked without a cbn, look up videos on YouTube.

Cable 3 : worked over 6 sts and 4 rows, worked as right leaning and /or left on either side of the work.

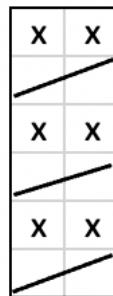


Right leaning :

Row 1. K

Row 2. K on RS, p on WS.

Row 3. place 3 sts on cbn at the back of the work, k3, k3 from cbn.

Row 4. K on RS, p on WS.

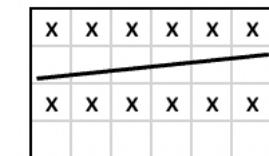


Left leaning :

Row 1. R

Row 2. K on RS, p on WS.

Row 3. Place 3 sts on cbn in front of the work, k3, k3 from cbn.

Row 4. K on RS, p on WS.

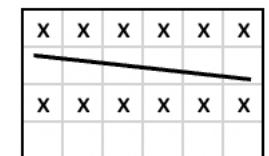


Cable 4 : worked over 8 sts and 4 rows, changes direction in the middle of the front and back sections.

First half of the work the cable is worked as follows :

Row 1. Knit

Row 2. Knit on RS, p on WS.

Row 3. Place 3 sts on cbn at the back of the work, k1, knit 3 sts from cbn, place 1 st on cbn

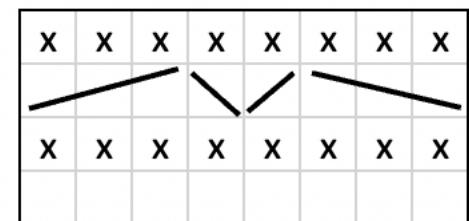

in front of the work, k3, k st from cbn.

Row 4. K on RS, p on WS.


Second half of the work :

Row 1. Knit

Row 2. k on RS, p on WS

Row 3. Place 1 st on cbn in front of the work, k3 sts, k sts from cbn, place 3 sts on cbn at the back of the work, k1, k3 sts from cbn.

Row 4. K on RS, p on WS.

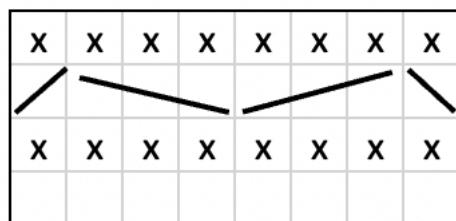

PATTERN STARTS HERE

FIRST SLEEVE

Cast-on 80 (80) 88 sts on a 3.5 mm needle and work rib in the round for 10 cm as follows: k1, p2, *k2, p2* repeat ** and with k1.

Change to 6mm needles.

SETTING UP THE PATTERN

K1, M1L, k8 (cable 4), p2, k6 (cable 3 L), p2, k2 (cable 2 L), p3, k32 (32) 40 (cable 1), p3, k2 (cable 2 R), p2, k6 (cable 3 R), p2, k8 (cable 4), M1R, k1.

You have now set up the sts for the cables. Continue working the sts as established, the 2 new sts should be purled. The cables start being twisted on the 2nd row. Cable 2 is twisted every second row, while the other cables are twisted every 4th row.

Work until the work measures 42 (40) 42 cm.

You will now cast-on new sts for the front and back of the sweater. The sweater is now worked flat. The k2 at the start of the round, should now be purled on the RS and knitted on the WS. It is recommended to make a note of which row you are on in relation to cable 1, to ensure a perfect mirror image when you work the opposite side. If you start casting on new sts on a row 3 for cable 1, the last decrease on the opposite side should happen on a row 7 of cable 1.

The first row with increases is worked after a WS row (WS row is a row without cable twists).

Cast on 26 new sts. As seen from the RS, these are p2, 24 cable 1 sts, continue over the sleeve sts and cast-on 26 sts on the other side

of the sleeve. Remember that the first and last sts of the work are worked as knit sts (**Tip:** it is recommended to make new sts with a backwards loop cast-on, the first 26 should be made on the left needle, so you can work back over them on the RS).

Work k2, p24, sleeve sts as established, p24, k2.

Cast on 18 new sts. As seen from the RS, these are p2, 6 sts cable 3, p2, 8 sts cable 4.

Continue over the new sts and sleeve and cast on 18 new sts on the opposite side.

Work k2, p6 (cable 3 R), k2, p8 (cable 4), and work the rest of the sts as established.

Cast-on 14 (22) 22 new sts, as seen from the RS these are k1, p1, k 8 (16) 16 cable 1, p2, k2 (cable 2). Work as established and cast-on 14 (22) 22 new sts at the end of the row.

These are worked: k2, p 8 (16) 16 (cable 1), k2, p2 (cable 2 R), work as established. The first and last st on all rows is a knit st.

Even though it may be satisfying to seam the side together at this stage, wait until the opposite side has been knitted so you can ensure a mirror image much easier.

BODY

Work as established until the work measures 22 (24) 26 cm, measured from the most recently cast on sts at the bottom.

You will now separate for the neck, starting on the RS. The back is worked first.

BACK

Work to the middle of cable 1 on the sleeve, cast-off the 4 most central sts. Continue down the back section. Note which row you are on, so you can match when you join on the other side of the neck opening.

Work a WS row, cast-off 1 st by the neck on the RS, and continue working flat until you have worked 15 cm from the cast-off sts. Cable 4 will be worked in the other direction as described earlier.

Work another 15 cm and make a new st by the neck. Make sure your work is a mirror image.

Work a WS row, break the yarn.

FRONT SECTION

Starting by the neck with a WS row, work back and forth from RS and WS, and decrease by a further 2, 2, 1 sts towards the neck.

Work for approx. 15 cm from the cast-off sts and change the direction of cable 4.

Continue knitting and make new sts to match the sts you decreased on the other side of the neck opening.

Join the front and back with 4 newly cast-on sts on a RS row, and continue flat. You can place a removable marker at the bottom of cable 4 on the front so you can measure from this point when casting off the side seams.

When the work measures approx. 22 (24) 26 cm and you are on the mirroring row of where you were when you did the cast-on sts for the body, cast off 14 (22) 22 sts on each side, on a RS row.

Then cast-off 18 sts on either side, and finally 26 sts.

Join for the sleeve, the first and last sts in the round are knit sts.

Continue in the round until the sleeve measures 42 (40) 42 cm and you are on a row 8.

Change to a 3.5 mm needle, work k2tog, and start to work in rib as follows: k1, p2, *k2, p2* repeat ** and k2tog the last 2 sts in round. Continue in rib for 10 cm and cast-off in rib.



SIDE SEAMS

Seam the sides together so they join together neatly.

NECK BAND

Pick up 108 sts, starting on the right side of the back with a 3.5 mm needle. Work k2, p2, in the round for 8 cm and cast-off in rib.

BOTTOM RIB EDGE

With a 3.5 mm, pick up 138 (142) 146 sts from the back sts, pm, and pick the same number of sts from the front sts.

Turn and work k2, p2 across the front, ending with k2. Continue flat until the rib measures 8 cm, cast-off in rib.

Note: The edge sts are worked as follows: on RS: slip first st purlwise with yarn in front of the work, k1tbl the last st in each row. On WS: slip first st purlwise with yarn in front and k1tbl the last st in each row.

Work in rib over the back sts as you did for the front, taking note whether you start on the RS or WS.

When the rib is 7 cm you will work short rows to lengthen the back.

Work a RS row until you have 13 sts remaining on the needle, turn with GSR, work as established in rib until 13 sts remain, turn with gsr.

Work up until 4 sts before the previous turn, and continue in this manner until you have turned 4 (5) 6 times on each side, 8 (10) 12 turns in total.

Work over all turning sts and end with a WS row, cast-off as sts show on the RS.

Weave in all ends, wash your sweater and lay it flat to dry between two towels.